


THE NEW CLOUD ACCESS

Viale Abruzzo 286/b 66100 chieti - 0871-565218 www.hoau.it



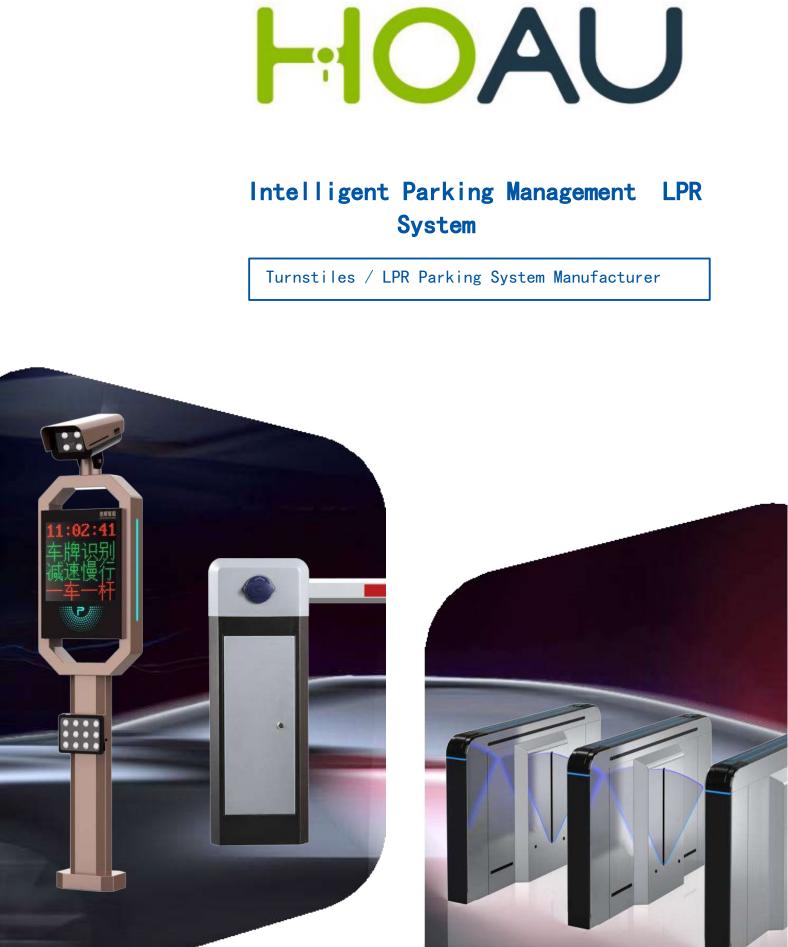

Production Capacity






















JS-STM002




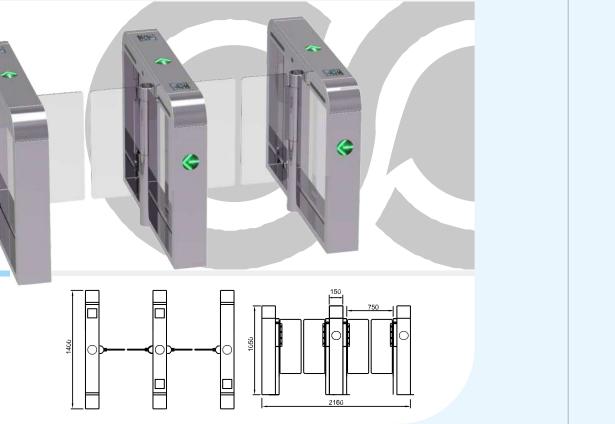


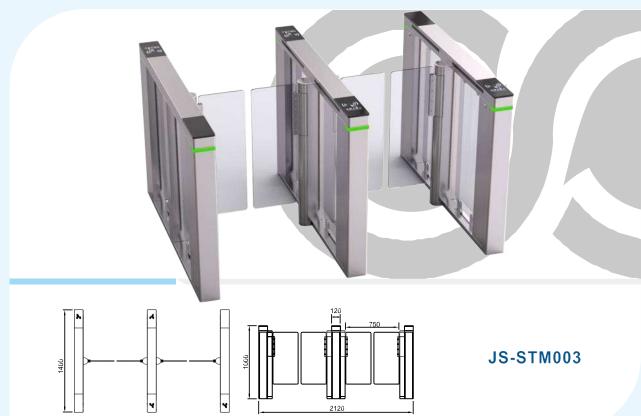

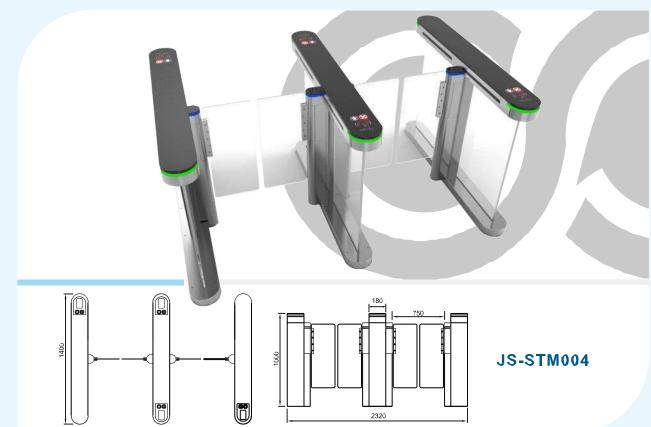


## OAU

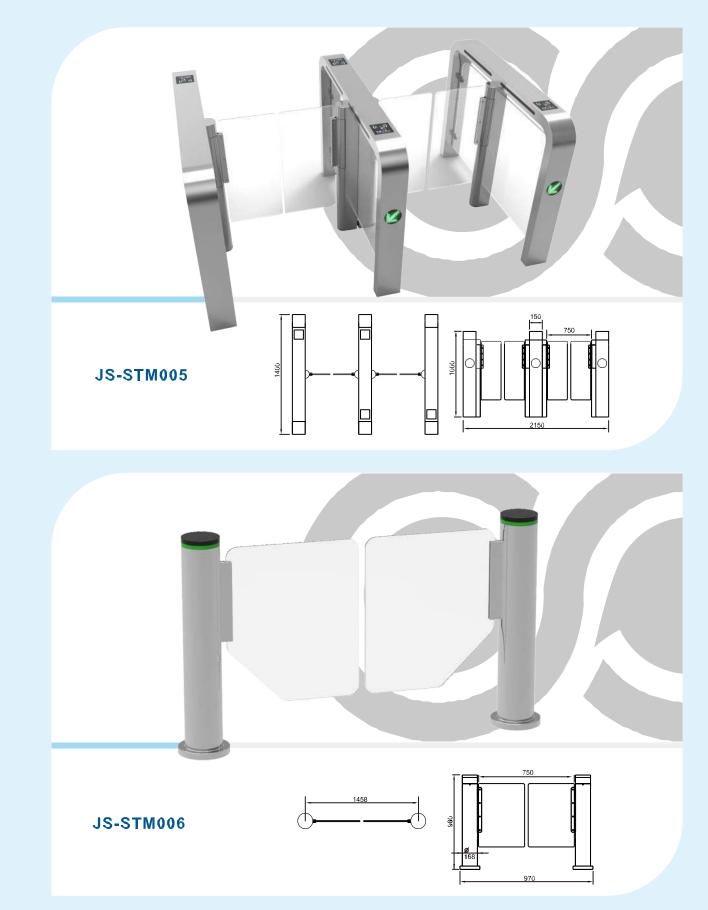

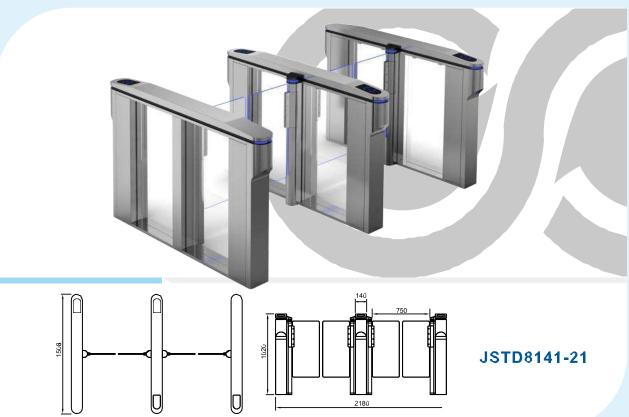







JS-STM188






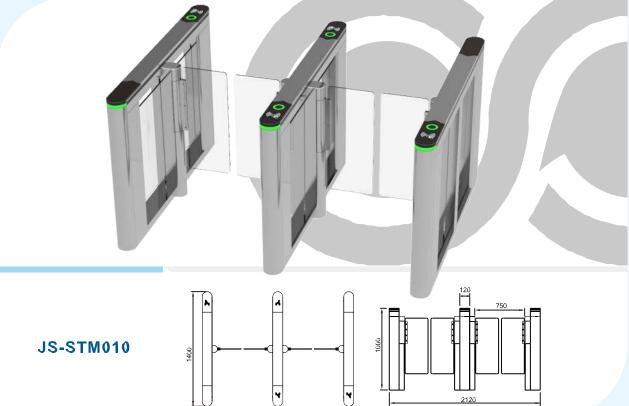









JS-STM011

## FLAP TURNSTILE SERIES

### JSTD6302-21


#### Features

- ARM micro processor controlling circuit, the adoption of digital positioning technology stabilizes the start out and running of the turnstile. Stable, low noise, simple and reliable structure.
- Rust free and anti-corrosion treatment on the surface, durable housing. Voice
- and light alert in case of illegal enter or tailing.
- Intelligent voice reminder, easy to operate.
- Counting, LCD/LED indication.
- Can connect with many systems, for example, access control system, shopping system, electronic ticket system, biometric system, static testing system and so on. Free access in case of power off, access control with power. High
- security, the turnstile is locked without opening signal. Remote
- control and management by computer.
- The opening signal is only valid for 5 seconds, high security.

#### Applications


The turnstile can be installed in transit stations, ports, factories, hotels and government facilities which need access management.




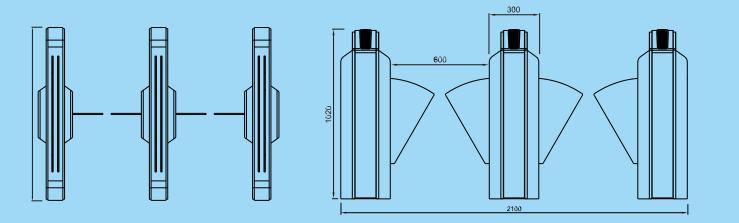







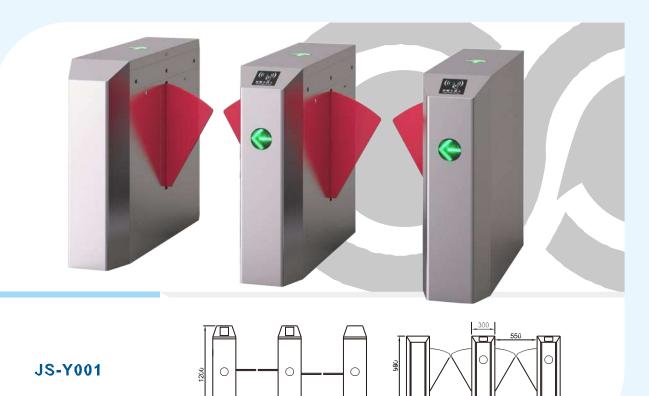


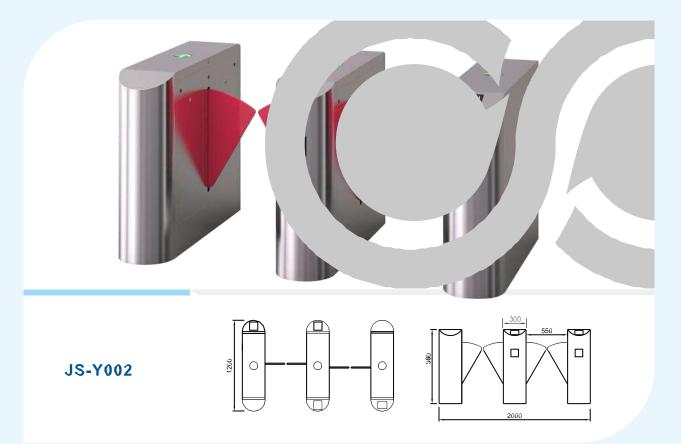

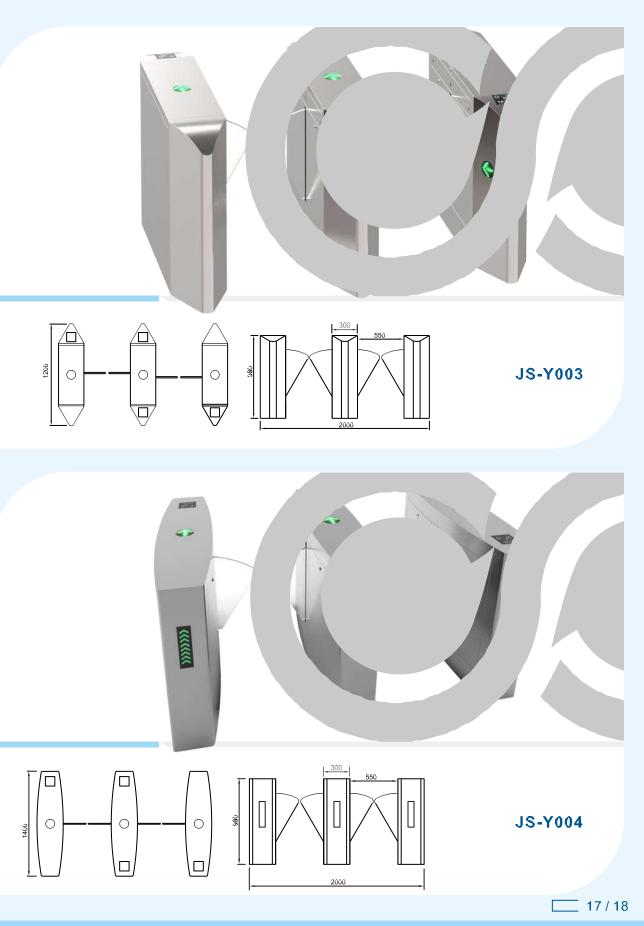

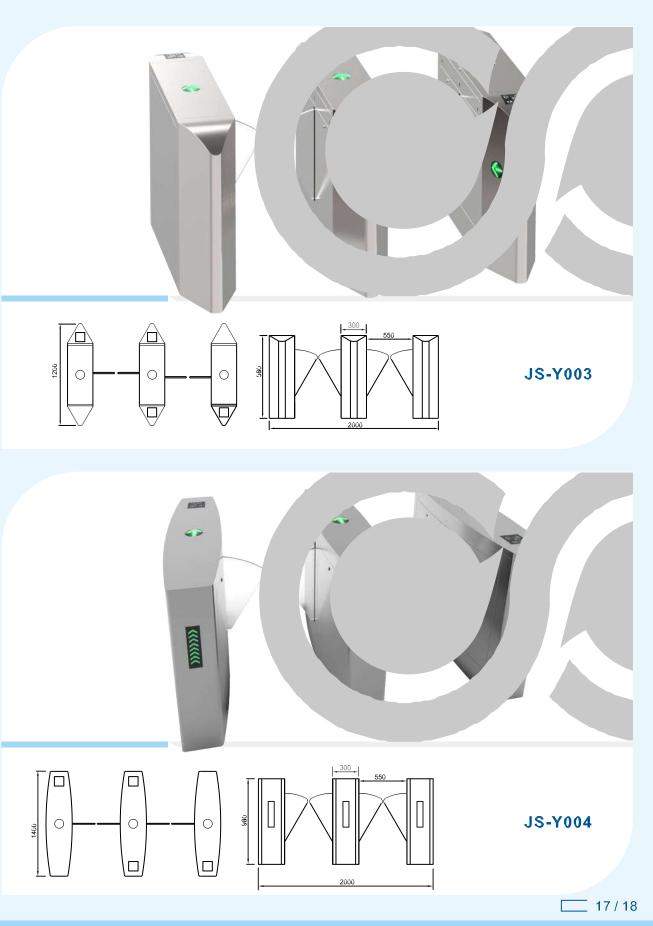




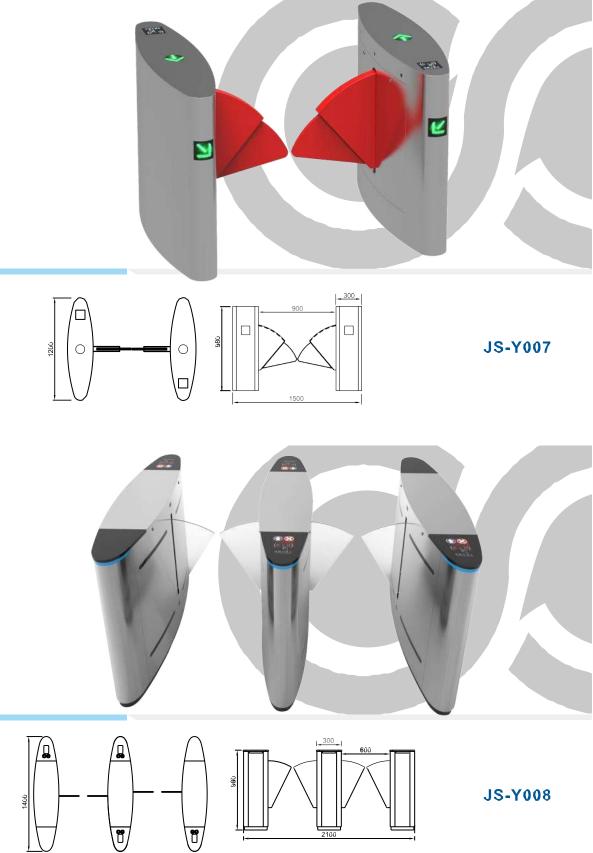






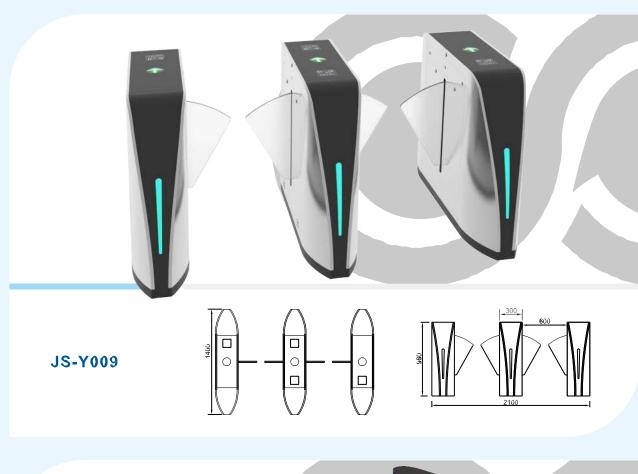



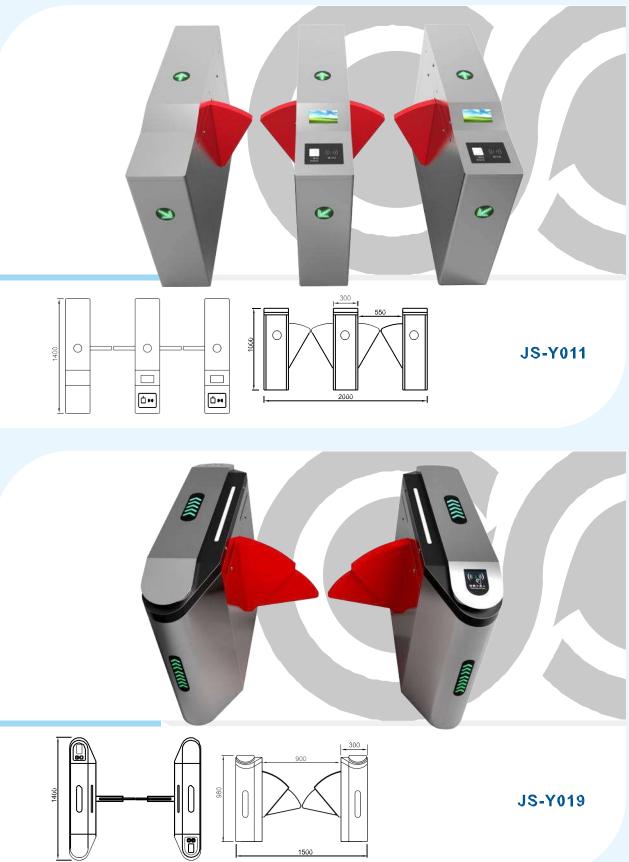

• **One Stop** \_\_\_\_\_

Intelligent Access Control Device Purchasing Service

## SWING TURNSTILE

#### **JSTD9162-21**


#### Features

- ARM micro processor controlling circuit, the adoption of digital positioning technology stabilizes the start out and running of the turnstile.
- Stable, low noise, simple and reliable structure. Rust free and anti-corrosion treatment on the surface, durable housing. Voice
- and light alert in case of illegal enter or tailing.
- Intelligent voice reminder, easy to operate.
- Counting, LCD/LED indication.
- Can connect with many systems, for example, access control system, shopping system, electronic ticket system, biometric system, static testing system and so on. Free access in case of power off, access control with power. High
- security, the turnstile is locked without opening signal. Remote
- control and management by computer.
- The opening signal is only valid for 5 seconds, high security.

#### Applications


The turnstile can be installed in transit stations, ports, factories, hotels and government facilities which need access management.




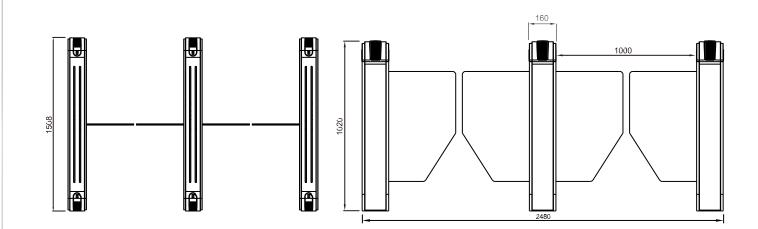







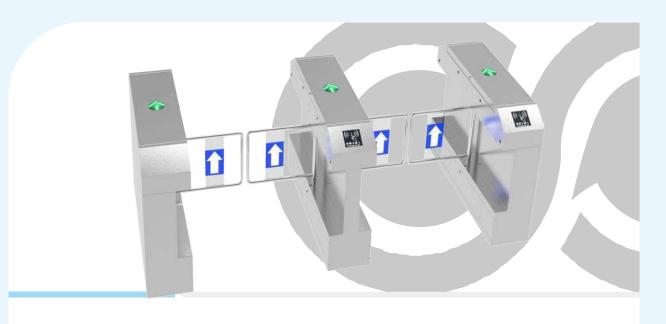







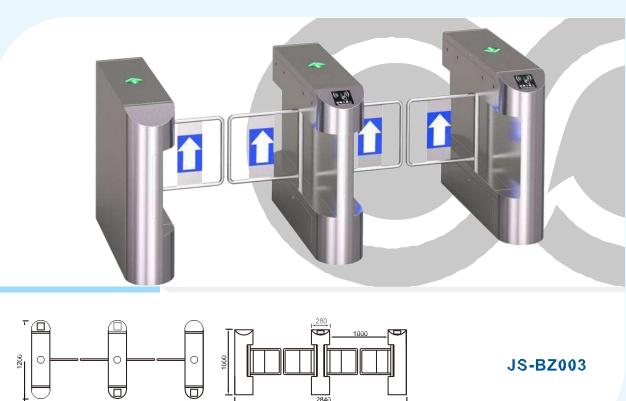

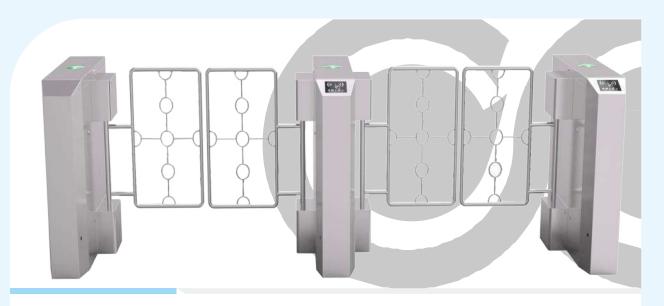






**JS-BZ007** 















JS-BZ010

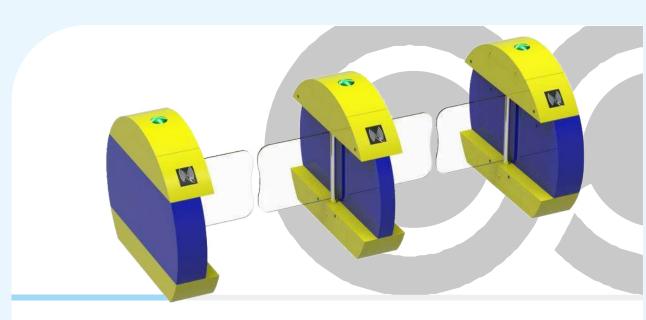









JS-BZ005



## LUXURY SWING GATE SERIES

#### JS-STZ003


#### Features

- ARM micro processor controlling circuit, the adoption of digital positioning technology stabilizes the start out and running of the turnstile. Stable, low noise, simple and reliable structure.
- Rust free and anti-corrosion treatment on the surface, durable housing. Voice
- and light alert in case of illegal enter or tailing.
- Intelligent voice reminder, easy to operate.
- Counting, LCD/LED indication.
- Can connect with many systems, for example, access control system, shopping system, electronic ticket system, biometric system, static testing system and so on. Free access in case of power off, access control with power. High
- security, the turnstile is locked without opening signal. Remote
- control and management by computer.
- The opening signal is only valid for 5 seconds, high security.

#### Applications


The turnstile can be installed in transit stations, ports, factories, hotels and government facilities which need access management.



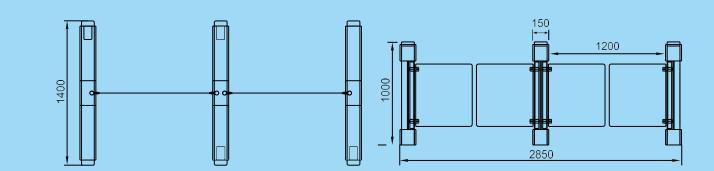







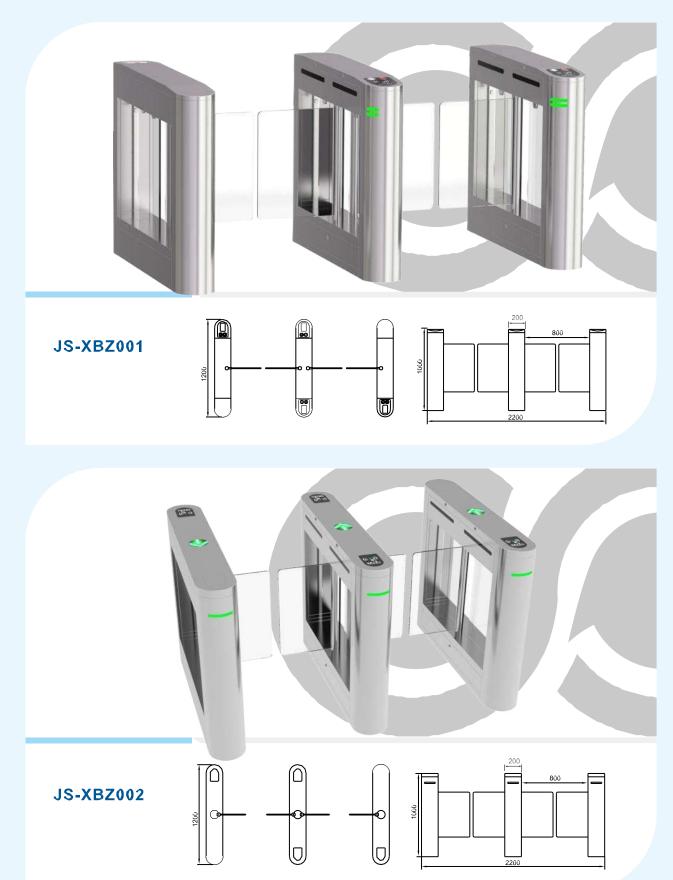












JS-XBZ004






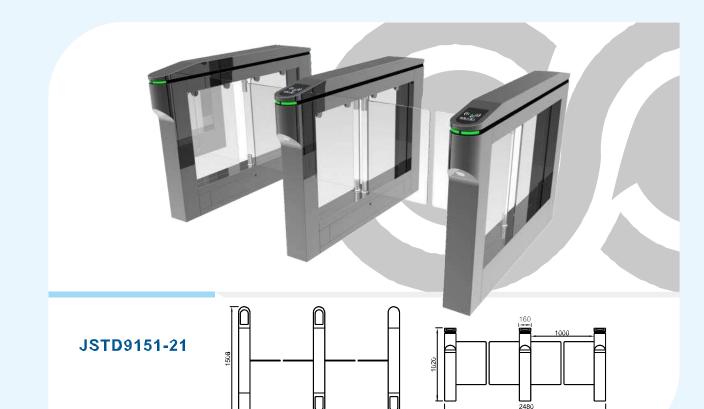


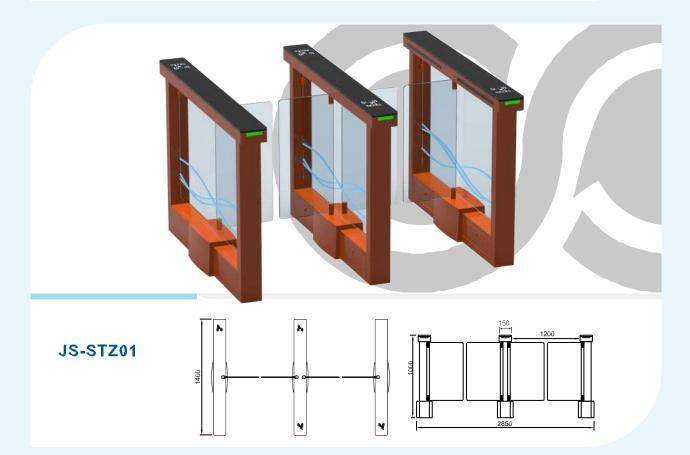

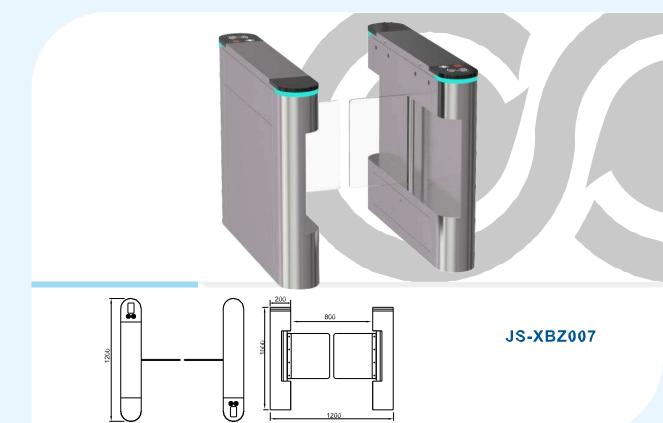







JSTD92002-21

## TRIPOD TURNSTILE SERIES

#### JS-SGZ006

#### Features


- ARM\_micro processor controlling circuit, the adoption of digital positioning technology stabilizes the start out and running of the turnstile.
- Stable, low noise, simple and reliable structure.
- Rust free and anti-corrosion treatment on the surface, durable housing. Voice
- and light alert in case of illegal enter or tailing.
- Intelligent voice reminder, easy to operate.
- Counting, LCD/LED indication.
- Can connect with many systems, for example, access control system, shopping system, electronic ticket system, biometric system, static testing system and so on. Free access in case of power off, access control with power.


KKKKK


- High security, the pod is locked without opening signal.
- Remote control and management by computer.
- The opening signal is only valid for 5 seconds, high security.


#### itions 💛 Appl

The turnstile can be installed in transit stations, ports, factories, hotels and government facilities which need access management.

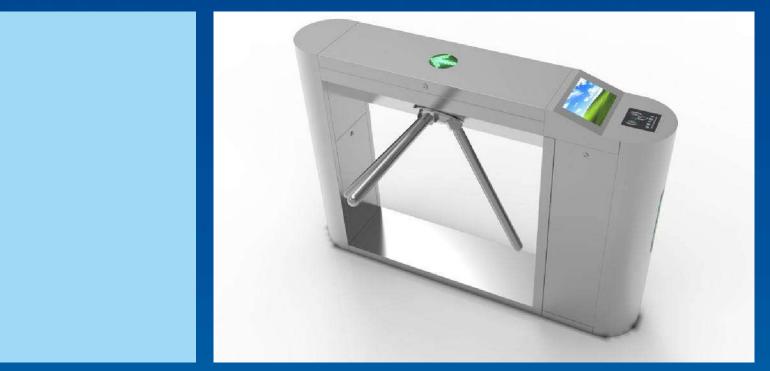

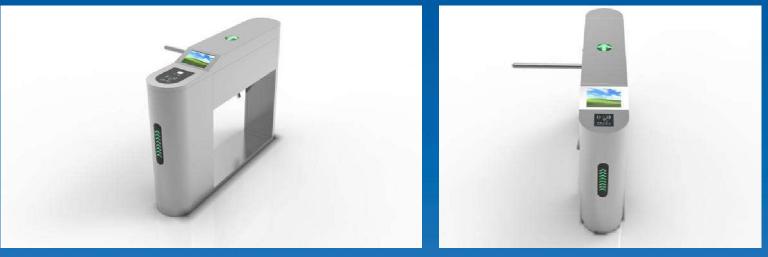











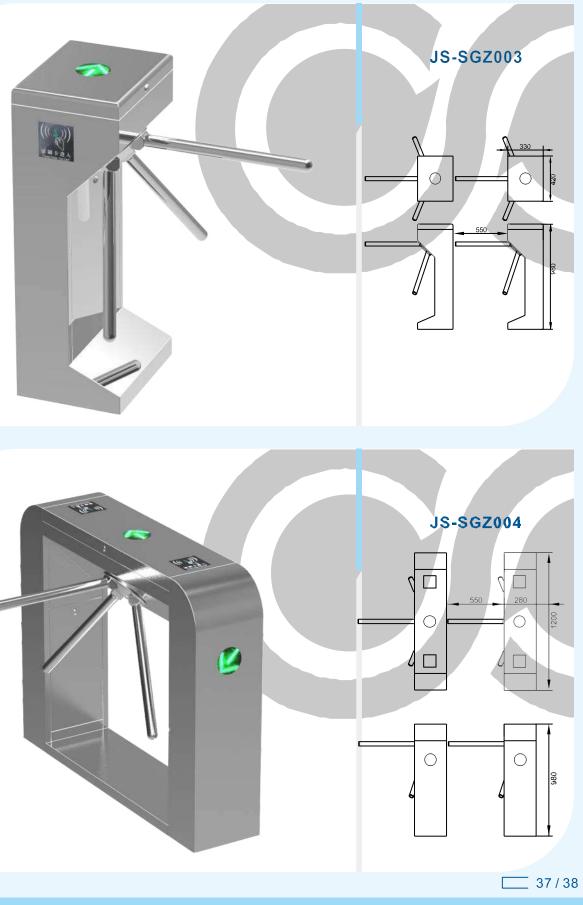


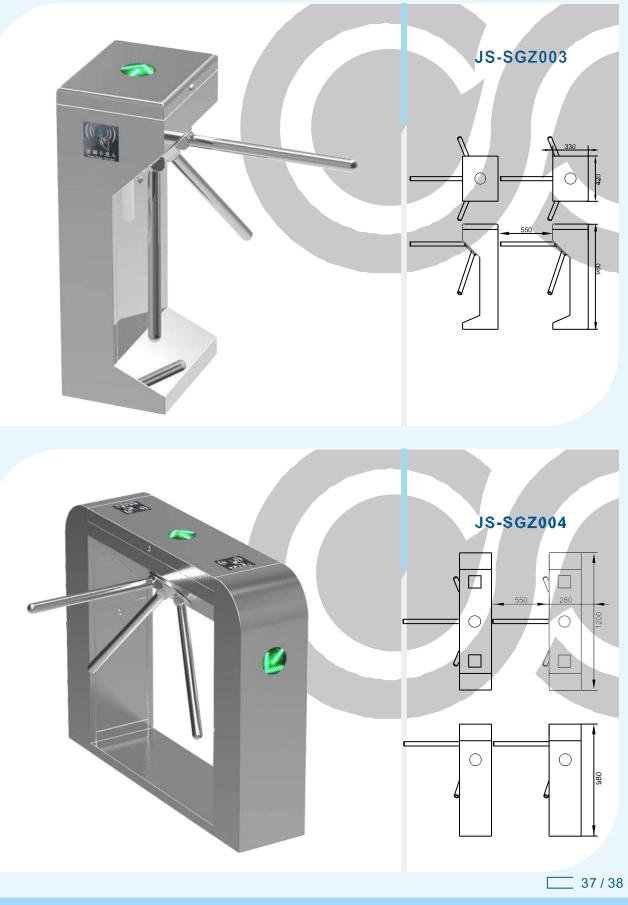


## - One Stop \_\_\_\_

Intelligent Access Control Device Purchasing Service

## HOAU

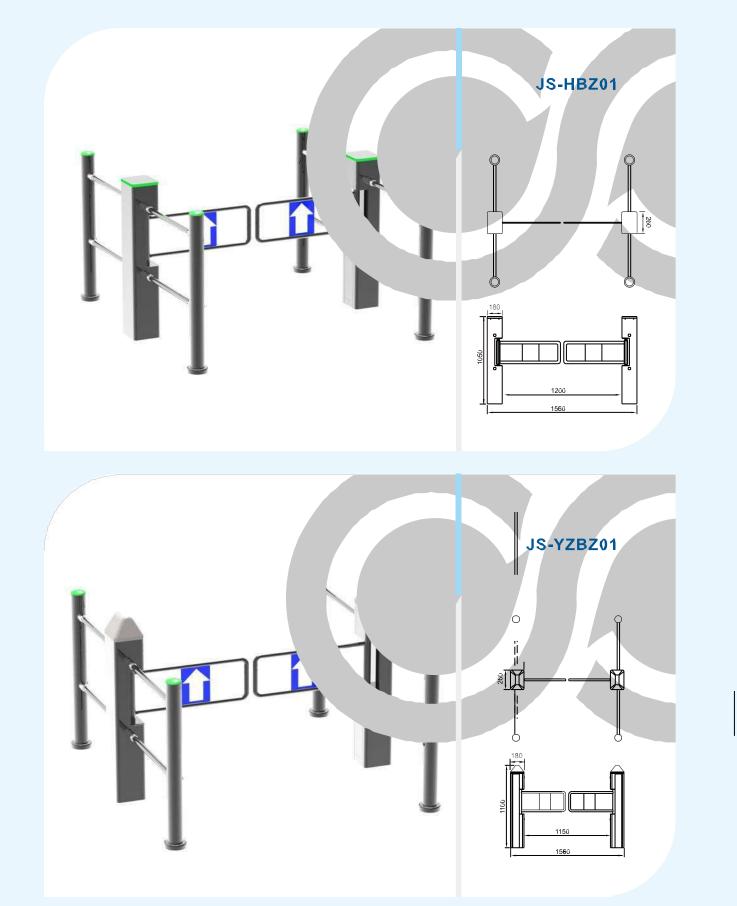



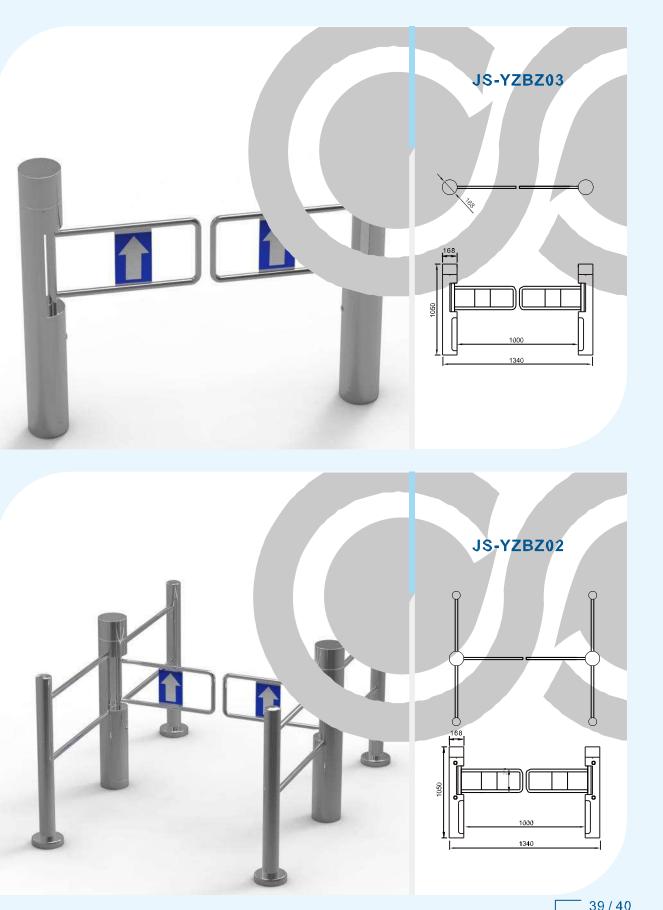

## SLIDING TURNSTILE SERIES

#### JS-PYZ018

#### Features

- ARM micro processor controlling circuit, the adoption of digital positioning technology stabilizes the start out and running of the turnstile.
- Stable, low noise, simple and reliable structure.
- Rust free and anti-corrosion treatment on the surface, durable housing. Voice
- and light alert in case of illegal enter or tailing.
- Intelligent voice reminder, easy to operate. ¢
- Counting, LCD/LED indication.

## ያያያናይልቢጣይናቴሪፑቶሪክ፡ጮሚዮረፍጄዴቲቴያያኔቲቀሺ<sup>or</sup>ኴየጃብምርቶዮቲ ይያያደይል የሚቴርዮሪ ቶጄዴቲዋክይ ይያያዩይልጣቘn d so on. Free access in case of power off, access control with power. High

- security, the turnstile is locked without opening signal. Remote
- control and management by computer.
- The opening signal is only valid for 5 seconds, high security.

#### cations

The turnstile can be installed in transit stations, ports, factories, hotels and government facilities which need access management.




JS-PYZ001





Intelligent Access Control Device Purchasing Service






2090






Ā 






JS-PYZ005






JS-XBZ008



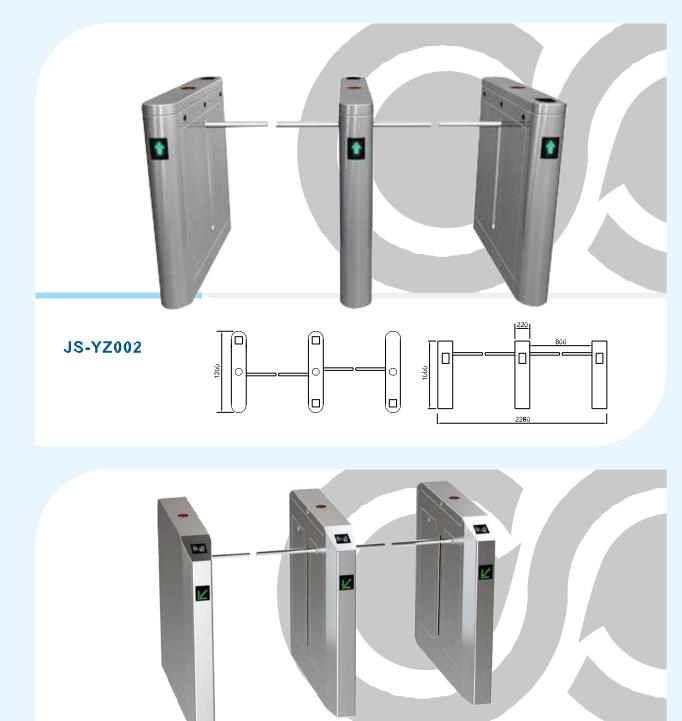

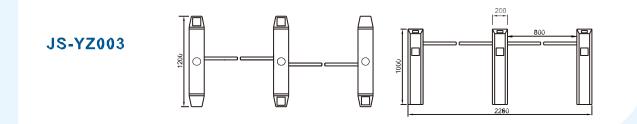



## INTELLIGENT FULL HEIGHT/WAIST HEIGHT TURNSTILE



### JS-QGZ008


#### Features

- ARM micro processor controlling circuit, the adoption of digital positioning technology stabilizes the start out and running of the turnstile.
- Stable, low noise, simple and reliable structure. Rust free and anti-corrosion treatment on the surface, durable housing. Voice
- and light alert in case of illegal enter or tailing.
- Intelligent voice reminder, easy to operate.
- Counting, LCD/LED indication.
- Can connect with many systems, for example, access control system, shopping system, electronic tickst system, biometric system, static testing system and so on. Free access in case of power off, access control with power. High
- ity, the turnstile is locked without opening signal. Remote
- I and management by computer.
- The opening signal is only valid for 5 seconds, high security.

#### Applications


The turnstile can be installed in transit stations, ports, factories, hotels and government facilities which need access management.


















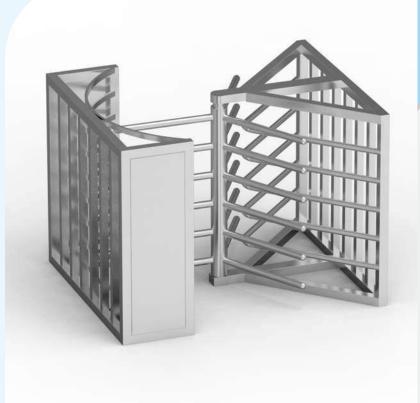

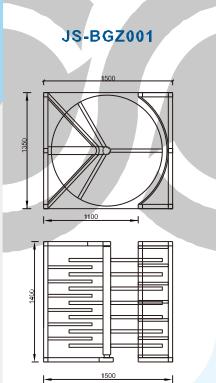


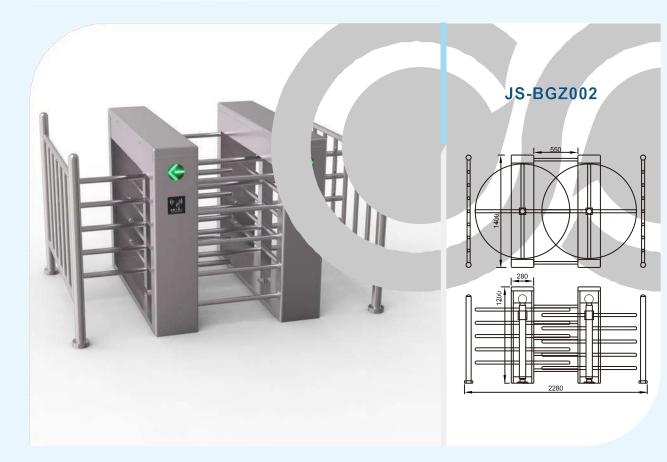


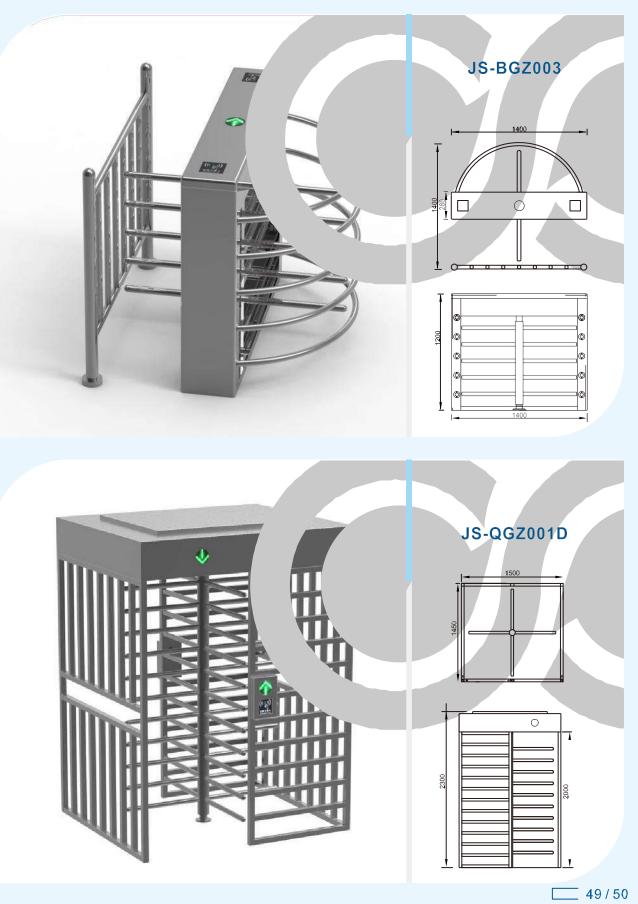


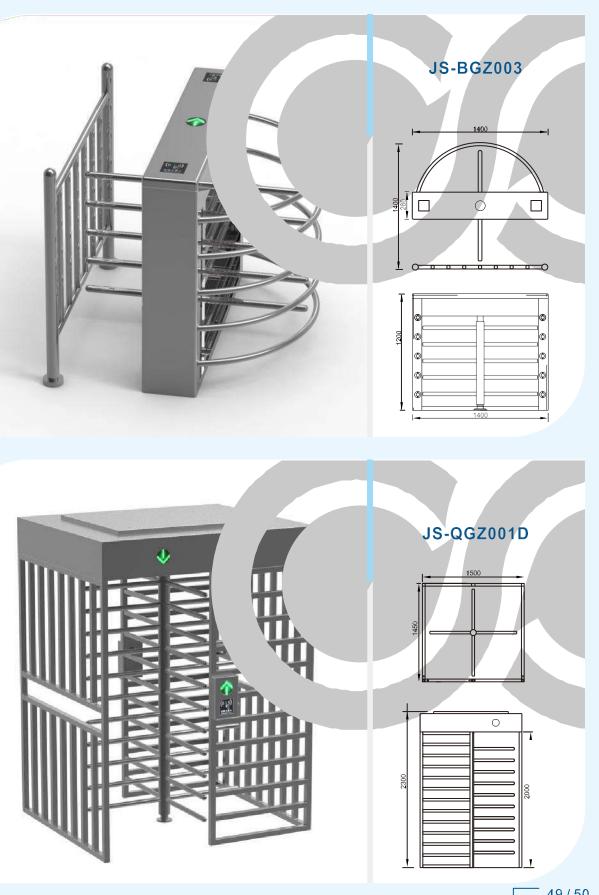


## HOAU

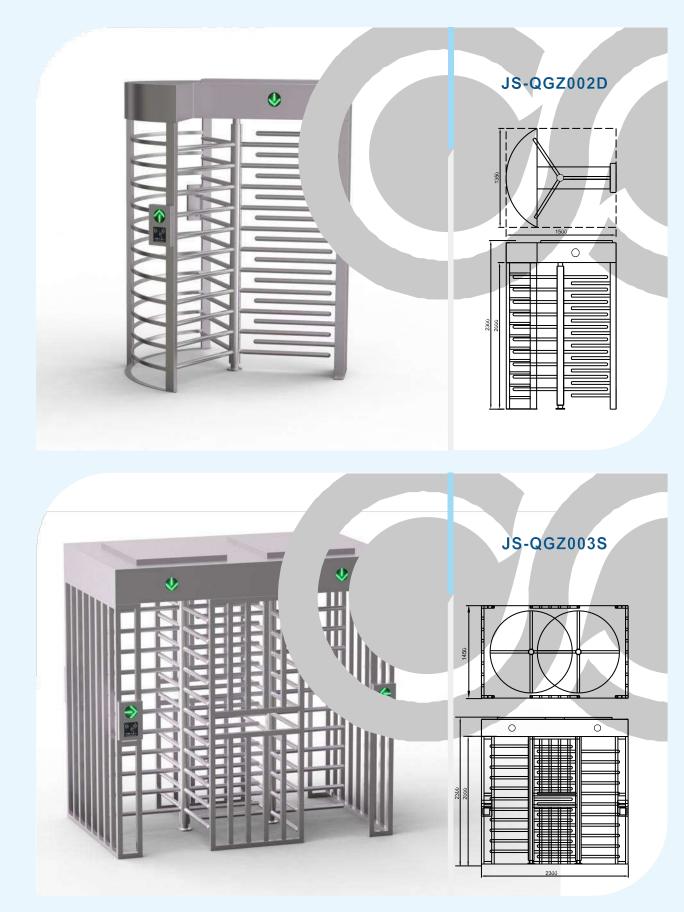


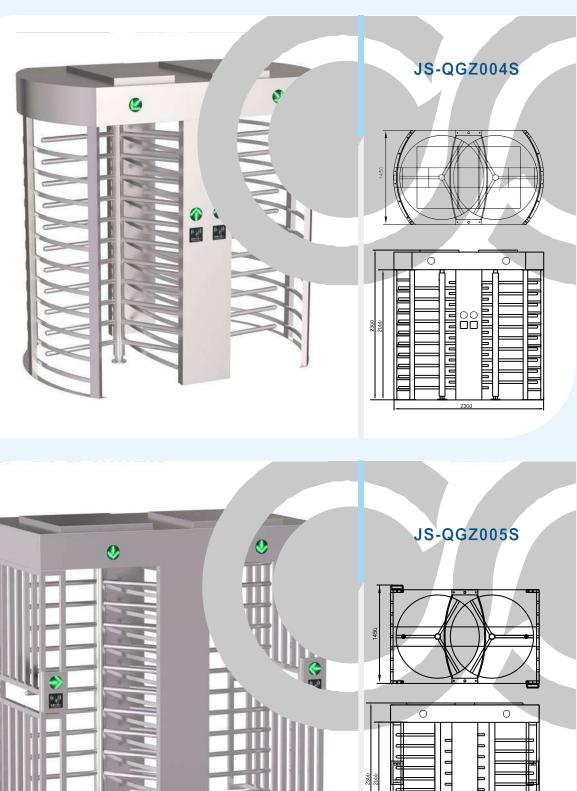


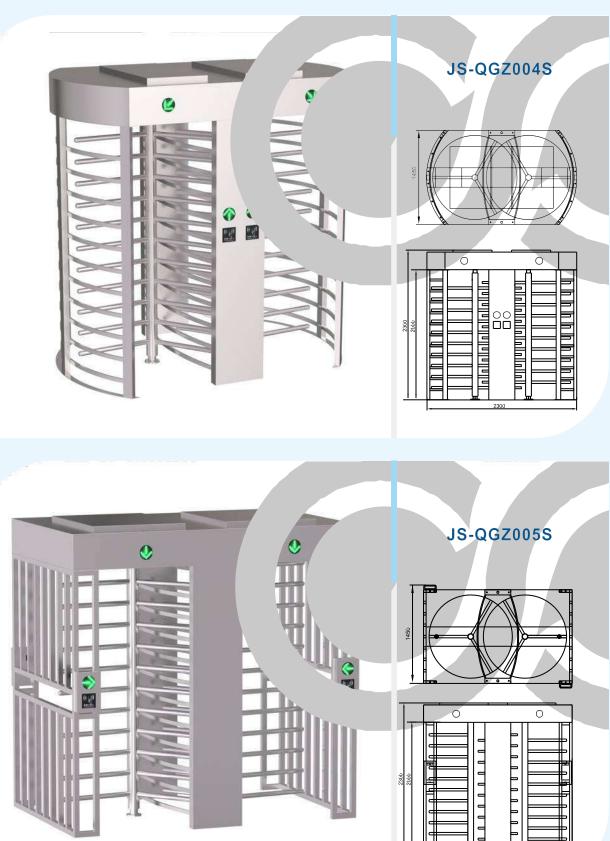

# HOAU

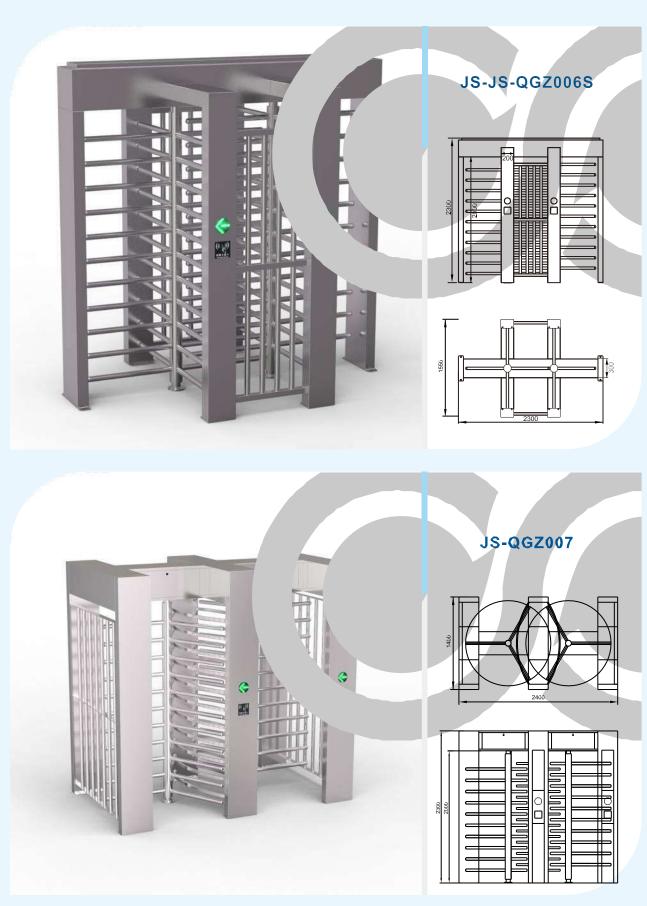

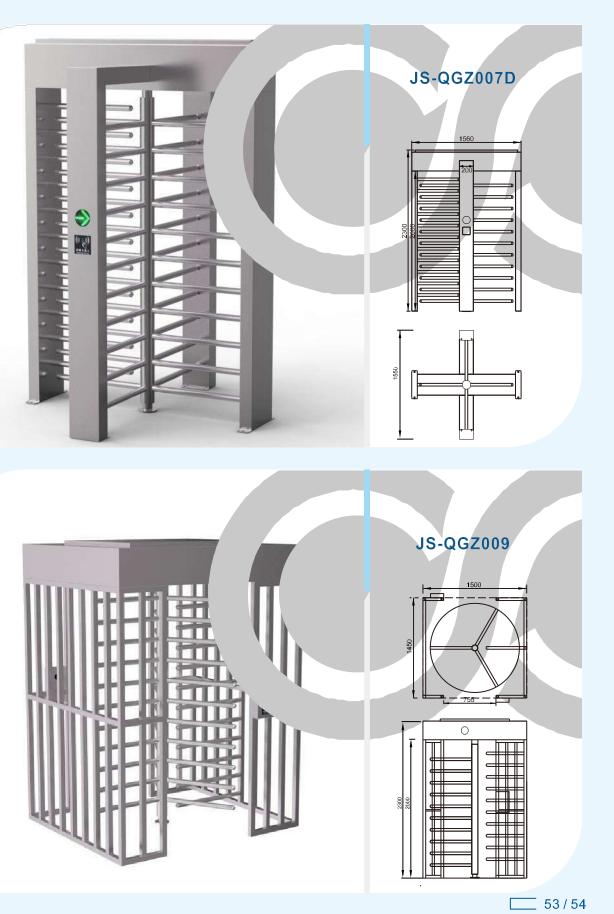

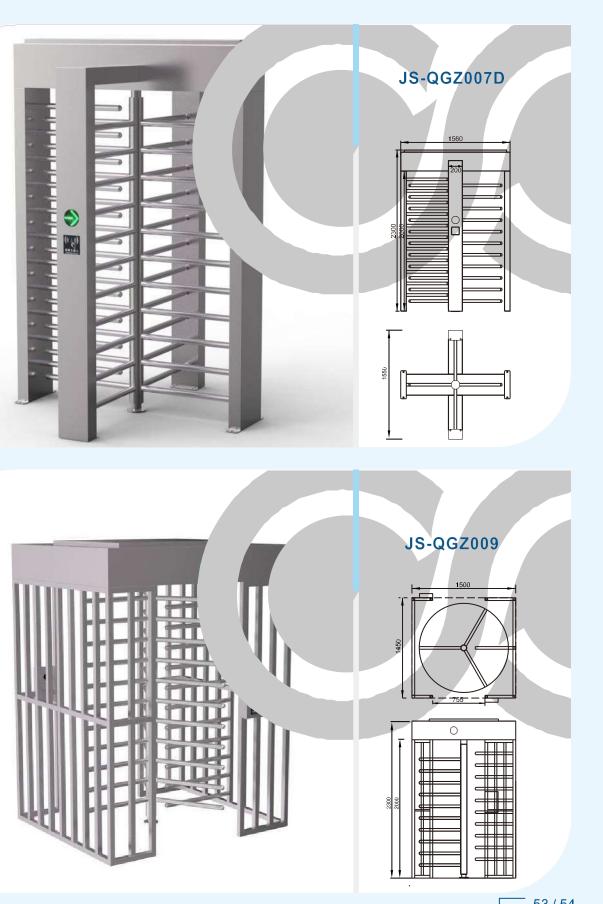



TLOED	
TIGER SERIES JS5	2
LICENSE PLATE RECOGNITION	
<ul> <li>✓ 300 Mega Pixel</li> <li>✓ Energy Saving, Intelligent Convenient Installation</li> </ul>	ompensation Light,
<ul> <li>✓ Protection Grade: IP55</li> <li>✓ Support Wechat, Alipay, Autom</li> <li>E-Coupons</li> </ul>	atic Pay,
Search vehicle access record vehicle type, operator, licen	
Support Electronic Payment an	
Platform nameme nt	









JS-CP001















## ADVERTISING BARRIER



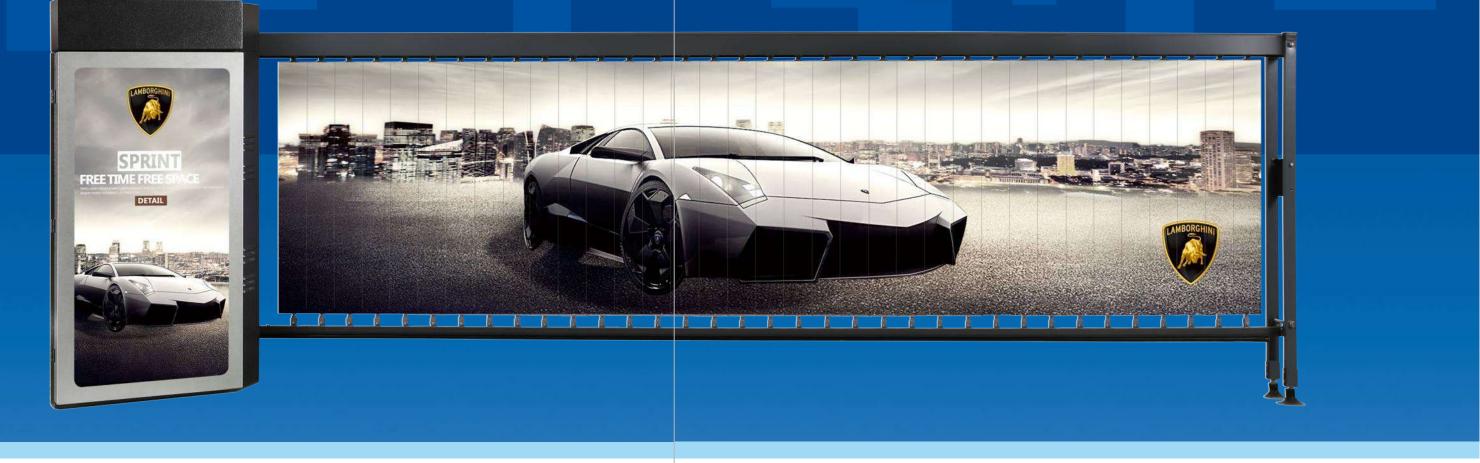





AC220V/50Hz	
350W/variable frequency motor	
Temperature-30°C~+70°C	
3-6 seconds/decided by the boom length	
Max 4.5 meters	
90mmx750mm	
Powered/Unpow ered	
Max size is 3500* 750mm	
420x380x1200mm	



### RISING BOLLARDS

#### Features&Functions

- No need to lay underground hydraulic pipelines, easy installation and low cost. Without
- hydraulic driving system shelter, exquisite appearance and space saving. Malfunction of
  - Single bollard will not effect the whole unit.
- Easy to disassemble, also convenient to replace damaged spare parts if any.
- Applicable for the controlling of 2 groups or above.

#### Technical Parameters

- System Control: Electronic Hydraulic Power
- Power Supply: 220V (optional 24V/36V)
- Material:: 304 Stainless Steel
- Bollard Thickness: 6mm Rising
- Height: 600mm Bollard
- Diameter: 219mm Bollard
- Quantities: 4 pieces
- Waterproof, Dust Free Grade: IP68
- Weight: 95KG
- Rising Speed: 4S
- Falling Speed: 2S
- Embedded depth: 1116mm Endurance: Can endure100 tons container truck
- Anti-collision Grade: Kó (Bollard can work normally
- Under vehicle bumping speed of 60KM/H)
- Working Environment: -35°C~75°C Storage
- Condition: dry and dust free

Hydraulic

**Rising Bollard** 





Movable Bollard Fixed Bollard

Rising Bollard Control System



- Hydraulic driving system, stable and reliable. Multiple control, support connection to other devices.
- System integration, easy installation and maintenance.





Extendable **Rising Bollard** 



Separated **Rising Bollard** 





## FACE RECOGNITION

Recognition speed can reach 0.1 second Recognition accuracy rate up to 99.98% Anti-corrosion, abrasion resistant, waterproof, dust free









Open the gate with face recognition and no need to swipe the card.



Construction Management Visitor Management Work

Attendance


High Definition Photos

Model Number: JS-RLL08 Screen Size: 7 inches 170° IPS LCD Screen Camera Resolution: 200 Mega Pixel Maximum Resolution: 1280x800 Sensor Area: 1001x20mm Image Size: 256x360pixel Storage Capacity: Internal storage 2G, support 8G TF Card Communication Interface: One RJ45,10M/100M applicable for Ethernet port automatically. Product Dimensions: 260x160x55mm Face Recognition: Recognition accuracy rate up to 99.8% . Face Recognition : Detect and trace 5 people simultaneously. Weight: ≈3KG


Face Capture Camera Face **Recognition Terminal Visitor Recognition Terminal Face Comparative Analysis** 

PARAMETERS



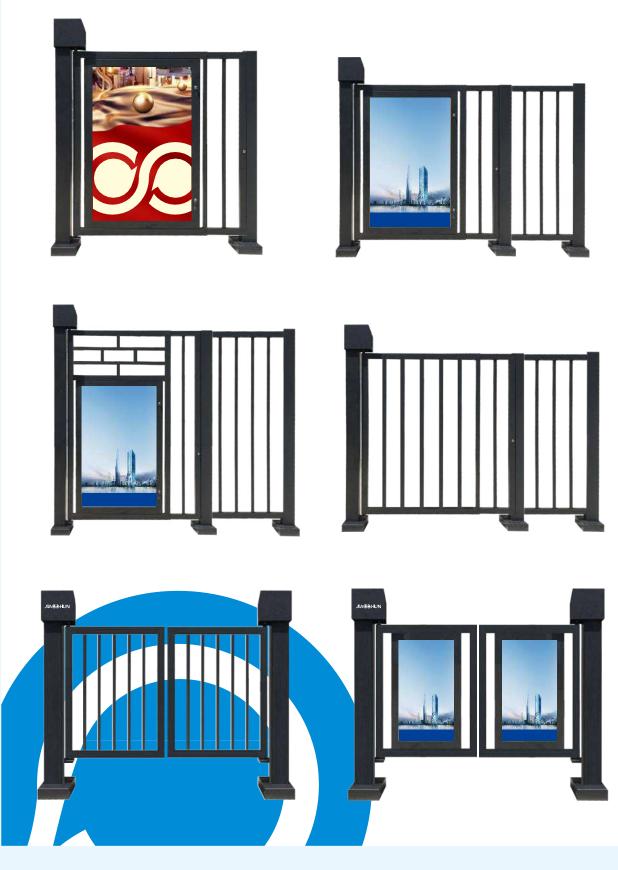



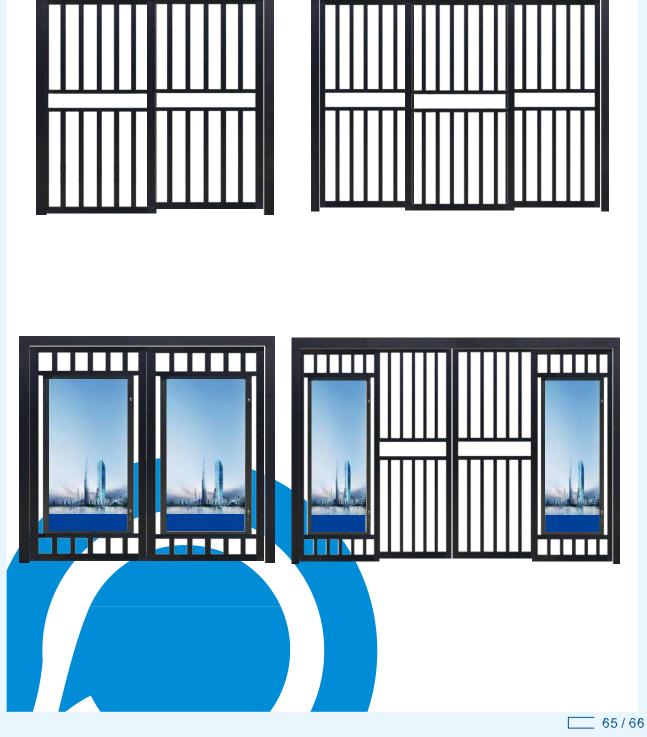






































## HOAU

















### K. -



